

The Thinner Box, You Deserve



IP54

← Only 36cm Thickness

## YOUR POWER STATION

Includes a PV Hybrid Inverter and Lithium Battery

Get in touch now:

Global: +86 571-56260008

AU: +61 1300 476529

Website: [www.solaxpower.com](http://www.solaxpower.com)

DE: +49 7231 4180999

UK: +44 2476 586998


Email: [info@solaxpower.com](mailto:info@solaxpower.com)





# Your Power Station

Your power station consists of one X1-Hybrid inverter (SK-TL) and **one** or **two 3kWh** or **6kWh** batteries.

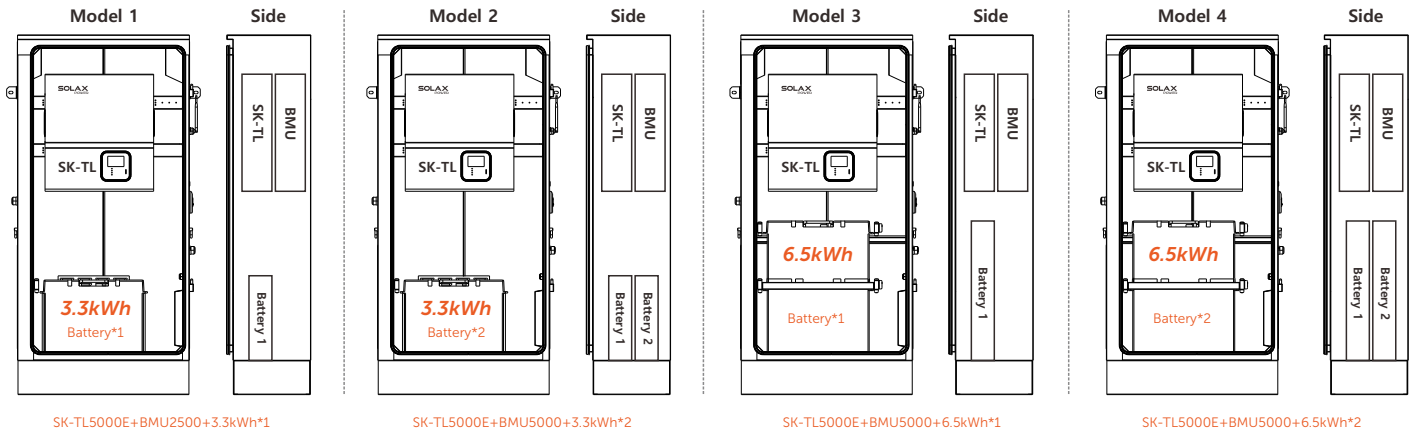

SK-TL5000E+BMU2500+3.3kWh\*1

SK-TL5000E+BMU5000+3.3kWh\*2

SK-TL5000E+BMU5000+6.5kWh\*1

SK-TL5000E+BMU5000+6.5kWh\*2

## Battery Specifications

### General Information

Module type	LG rack mount
Battery type	Li-ion (NMC)
Components	Battery Cells + BMS + Protection Device (Breaker)

### Performance

Nominal Capacity <sup>1</sup> [Ah]	63	126
Nominal Energy <sup>1</sup> [kWh]	3.3	6.5
Nominal Voltage [V]	51.8	
Operating Voltage [V]	42~58.8	
Max. Charge/Discharge Current <sup>2</sup> [A]	63	63
Max. Charge/Discharge Power <sup>2</sup> [kW]	3.3	3.3
Continuous Charge/Discharge Power <sup>2</sup> [kW]	3.0	3.0
Round-Trip Efficiency [%]	≥95	

Cooling	Natural convection	
Communication Protocol	CAN 2.0B or Modbus 485	
Interface Port	RJ48	
Dry Contact	2Ch (Warning or Fault 1/Fault 2)	
Cabinet Dimensions [mm]	750*1570*367	

### Operating Conditions

Operating temperature range [°C]	-10~45
Optimal operating Temperature [°C]	15~30
Storage Temperature [°C]	-30~60
Self -Discharge Rate During Storage [°C]	Less than 6% per year at 25
Humidity [%]	5~95
Altitude [m]	Below 2,000

### Certification

Certification (SK-TL)	VDE 4105 / AS/NZS4777.2 / C10 11 / EN50438-NL / EN50438-DK / OVE ONORME 8001/ G83,G59 / CEI 0-21
-----------------------	---

1 At standard conditions:

- Charge: CC-CV, with 0.3CC, to 58.8V (3.15A cut off) at 25°C
- Discharge: CC, with 0.3CC, to 42V at 25°C

2 It can be de-rated in accordance with the power limit by BMS.

※ Not acceptable to use two kinds of modules mixed

\*Can be modified without notice.(V1)